

## Fuse-Link Types – House Service

**Rating:**

- Voltage: 415V AC.
- Ratings: 30A up to 100A.
- Type RHF Series 22 x 57mm.
- Type RHLF Series 30 x 57mm.

**Standards:**

- AS60269-3




RHF50




RHLF100

Rated Current (A)	Rated Voltage (AC)	Breaking Capacity (kA)	Length (mm)	Pack Qty.	Catalogue Number
30	415	33	57	10	<b>RHF30</b>
40					<b>RHF40</b>
45					<b>RHF45</b>
50					<b>RHF50</b>
60					<b>RHF60</b>
80					<b>RHF80</b>
100					<b>RHB100</b>
50	415	33	57	10	<b>RHLF50</b>
60					<b>RHLF60</b>
80					<b>RHLF80</b>
100					<b>RHLF100</b>

**Dimensions:**

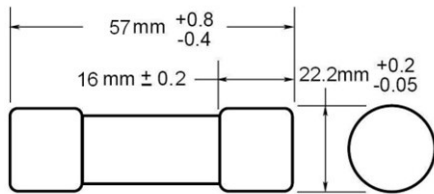

RHF

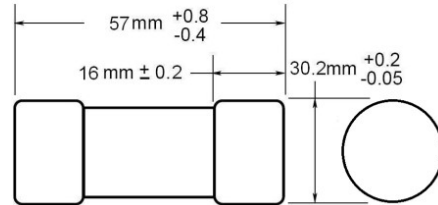


RHLF

### Electrical Characteristics

Catalogue Number	Size (mm)	I <sup>2</sup> t (amps <sup>2</sup> seconds)		Watts Loss (W)	Current Rating
		Pre Arcing	Total		
<b>RHF30</b>	22 x 57	400	4,500	2.65	30
<b>RHF40</b>		520	5,850	4.4	40
<b>RHF45</b>		1,250	11,700	4.6	45
<b>RHF50</b>		1,600	16,000	4.75	50
<b>RHF60</b>		2,100	19,200	4.8	60
<b>RHF80</b>		4,000	30,000	5.3	80
<b>RHB100</b>		8,500	68,000	5.8	100
<b>RHLF50</b>	30 x 57	1,600	16,000	4.6	50
<b>RHLF60</b>		2,100	19,200	4.7	60
<b>RHLF80</b>		4,000	30,000	5.5	80
<b>RHLF100</b>		8,500	68,000	5.8	100

Fuse-Link Types – House Service

Time Current

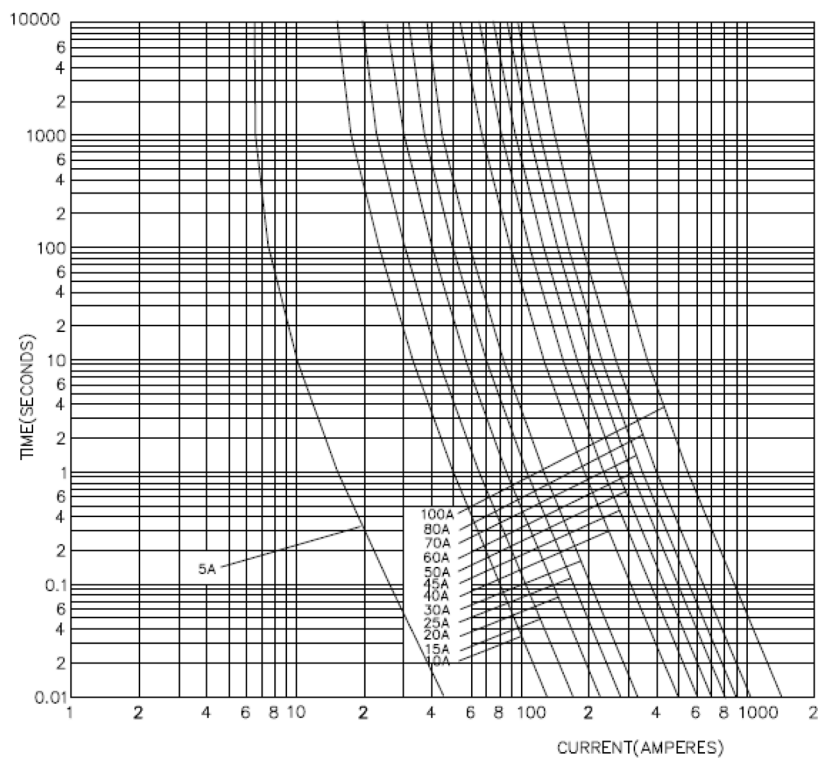

Cut-off Current

