

BWP ECO LED Weatherproof Batten Gen 2

BWPECO404ECSLS

- High efficacy with up to 130lm/w
- Select colour temperature from 3000K/4000K/6000K
- Select lumen output from 20W/27W/33W/40W




LUMEN^{SELECT} | COLOUR^{SELECT}

Performance

System Power	40W, 33W, 27W, 20W, 37W, 33W, 20W, 27W, 40W, 20W, 33W, 40W
Exit Lumen	5200lm, 4200lm, 3400lm, 2500lm, 3400lm, 4000lm, 2700lm, 3600lm, 5200lm, 2500lm, 3900lm, 4600lm
Efficacy	117lm/W, 118lm/W, 133lm/W, 125lm/W, 125lm/W, 121lm/W, 135lm/W, 133lm/W, 130lm/W, 125lm/W, 118lm/W, 115lm/W
Tuneable CCT	N/AK to N/AK
CCT	3000K, 4000K, 6000K, 3000K, 3000K, 3000K, 4000K, 4000K, 4000K, 6000K, 6000K, 6000K
CRI	80
Operating Temperature	0°C to 40°C
MacAdam Steps	5SDCM
Ingress Protection Rating	IP65
Impact Rating	IK08
Beam Angle	100°
Warranty	3 Years
Lifetime	54,000hrs (L70/B50)

Line Drawings

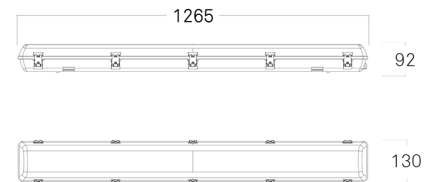

Product Images



Physical

Dimensions	L1265 x W130 x H92mm
Diffuser	Polycarbonate
Luminaire Colour	Grey (Light)
Weight	2kg
Luminaire Material	Plastic (Polycarbonate)
Driver Location	Integrated
Finish	UV Stabilised
Installation	Surface Mounting

Emergency

Emergency Version	No
-------------------	----



Electrical

Dimming	Non - Dimmable
Voltage	240V
Line Voltage Frequency	50Hz
Inrush Current	12A
Line Current	0.19A
Electrical Rating	Class 1