


# EA1601A, EA1601B, EA1601C, EA1601D, EA1601E

## Cable Gland – 1 hole, 2 hole, 3 hole, 4 hole, 5 hole

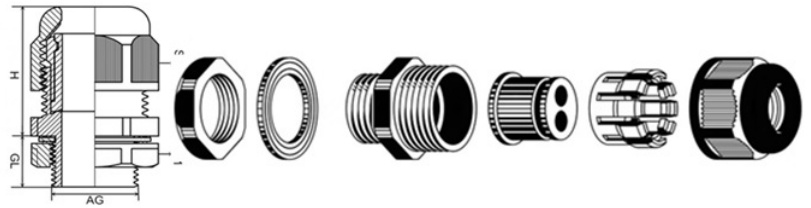

Thread	Part No	Cable Range	AG	GL	H	SW1/SW2
		mm	mm	mm	mm	mm
M25 x 1.5	M25-H1-6	2-6	25	15	34	33/33
M25 x 1.5	M25-H2-6	2-6	25	15	34	33/33
M25 x 1.5	M25-H3-6	3-6	25	15	34	33/33
M25 x 1.5	M25-H4-6	4-6	25	15	34	33/33
M25 x 1.5	M25-H5-6	5-6	25	15	34	33/33

### Specifications

Material	UL approved Nylon PA66
Fix Claw	UL approved Nylon PA66
Hermetic Seal	Weather resistant EPDM Rubber
Washer(O Ring)	Weather resistant EPDM Rubber
Fire Proof Degree	UL94V-2 (V0 customized)
Protection Degree	IP68
Working Temperature	-40°C to 100°C
Color	Black(RAL9005), Grey(RAL7035), customized colors

**Please Note:**

Please consult with your Electrician/Engineer to ensure suitability for the intended application and installation.

PGK Distribution takes every precaution to ensure the information in this publication is correct but accepts no liability of any kind and reserves the right to change any detail in this catalogue without notification.

**PGK Distribution**

VIC Main Office

8 Mohr St Tullamarine, Vic 3043

T: 1300 PGK SOL