


Catalogue No: CA7-9-10-24VAC

CONTACTOR 4kW 3P 24V AC 50/60Hz COIL 1NO AUXILIARY

Motor Control and Drives > Motor Starting and Protection > Contactors > Sprecher + Schuh Contactors > CA7
Contactors 4 to 55kW > 3 Pole Contactors with AC Coil

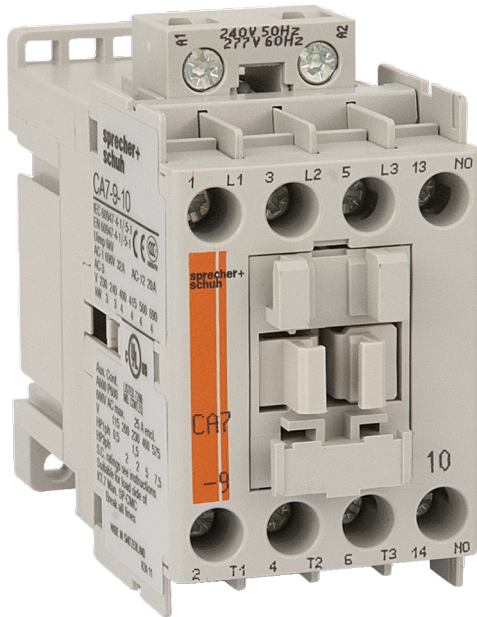

Contactor 3 pole 9A 4kW 1N/O Auxiliary 24V AC Coil

- Easy selection with 12 sizes, one for each standard motor kW rating (4-55kW)
- Common accessories for the range
- Side or top mount auxiliary contacts provide flexibility to suit enclosure space

Representative Photo Only
(actual product may vary based on configuration selections)

SPECIFICATIONS

Product Series	CA7
Component Type Motor Control and Drives	Standard Contactor
Ie, Rated Operational Current, AC-1, 415V, 40°C	32 A@415V,40°C
kW Rating, AC-3, 415V, 60°C	4 kW @415V, 60°C
Ie, Rated Operational Current, AC-3, 415V, 60°C	9 A@415V,60°C
kW Rating, AC-3, 690V, 60°C	4 kW @690V, 60°C
Ie, Rated Operational Current, AC-3, 690V, 60°C	5 A@690V,60°C
Number of Poles	3
Contact Configuration, Main Poles	3 NO main poles
Coil Type	Conventional type
Coil Consumption Hold-in VA AC coiled contactors	2.7 VA 9.5
Coil Consumption Pickup VA AC coiled contactors	75 VA
Integrated Aux	1 N/O
Coil Voltage	24 V AC V
Un, Coil Voltage, AC @50Hz, Nom	24 V AC nom @50Hz
Un, Coil Voltage, AC @50Hz, Min	21 V AC min @50Hz
Un, Coil Voltage, AC @50Hz, Max	27 V AC max @50Hz
Tightening Torque, Power Terminals, max	2 Nm max
IP Rating	IP20


Catalogue No: CA7-9-10-24VAC

CONTACTOR 4kW 3P 24V AC 50/60Hz COIL 1NO AUXILIARY

Motor Control and Drives > Motor Starting and Protection > Contactors > Sprecher + Schuh Contactors > CA7 Contactors 4 to 55kW > 3 Pole Contactors with AC Coil



REFERENCES	
IECEX Certificate	-
Supplier Declaration of Conformity:	-
Installation Guide:	-
User Manual:	-
Manufacturer Datasheet:	-
Manufacturer Catalogue & Product Selection:	-

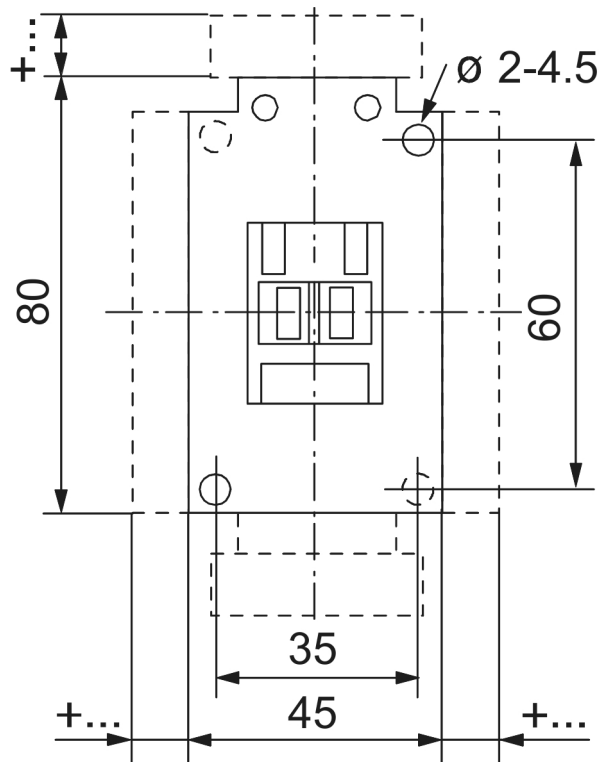

Dimension Diagram