



VISTALITE

VSL20W40W12-TRI-EM

SAP CODE: 2001635




20/40W Tritone indoor LED batten

A diffused appearance LED batten with a choice of 3 colour temperatures and dual intensity.



Photometric Diagram



Unit: cd
 - C0/180 120.0deg
 - C90/270 120.0deg

KEY INFORMATION

Lumen Output ^{40W}	4140 / 4540 / 4610lm
^{20W}	2100 / 2330 / 2390lm
Input Power	40W
Hole Cutout Size	N/A
Install	SUSPENDED, SURFACE MOUNT
Dimming Options	Non-Dimmable
Trim Colour	WHITE
Warranty	4yr
IP Rating	IP40
IK Rating	N/A
IC Rating	N/A
Rebate Scheme Approvals	Pending Approval ETA Mid October

PHOTOMETRIC

Efficacy ^{40W}	104 / 113 / 115lm/W
^{20W}	105 / 117 / 119lm/W
LED	SMD
CCT	4000 / 4700 / 5700K
CRI	>80
Beam Angle	120°

ELECTRICAL

Driver	Integral
Supply Input	220-240V, 50/60Hz
Driver Output Voltage	27-37VDC
Power Factor	>0.9
LED Input Current (nominal)	700-1050mA
Useful life @Ta25° (L70)	50,000hr



CONSTRUCTION

Housing	Powder Coated Steel
Optics	Polycarbonate Diffuser
Adjustable Angle	N/A
Fixings/Hardware	N/A
Connection Type	Terminal Block
Total Weight	2.8kg
Dimensions	1205 x 68 x 68mm
Operating Ambient Temp.	0 to 45°C
Electrical Classification	Class 1

Emergency Kit

VISTALITE Emergency with Lithium Iron Phosphate battery technology

VISTALITE emergency batten powered by Lithium Iron Phosphate (LiFePO4) battery technology provides emergency escape lighting during power failures.

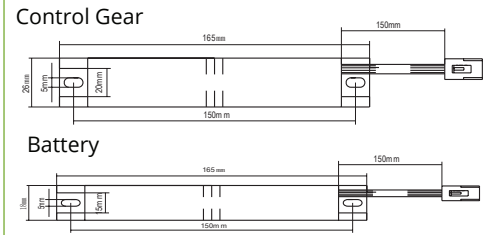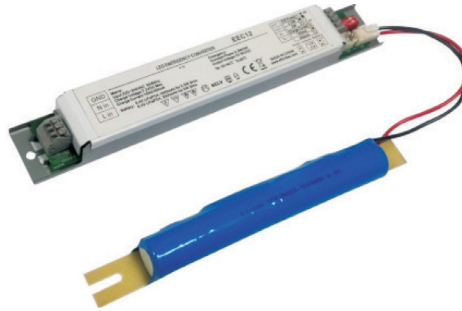

QUICK FACTS

- Lithium Iron Phosphate (LiFePO4) battery
- Provide emergency lighting during power failures
- Manual testing

SPECIFICATIONS

Max Battery Temperature	60°
Battery Warranty	2 Years
Operation	Sustained
Emergency Classification	C0 D50 C90 D32

MAXIMUM SPACING BASED ON 0.2lx (AS/NZS2293.1:2018)

Maximum Spacings Mounting Height (Metres)

Luminaire Classification	2.1	2.4	2.7	3.0	3.3	3.6	4.0	4.5	5.0	6.0	7.0	8.0	9.0	10	15	20
D32	11.5	13.2	14.8	16.5	17.6	18.0	18.5	19.0	19.5	20.1	20.5	20.7	20.6	20.3	0.0	
D50	11.5	13.2	14.8	16.5	18.1	19.8	21.8	22.5	23.1	24.1	24.9	25.4	25.7	25.8	23.6	0.0

